

Secret Keys Assisted Private Classical Communication Capacity over Quantum Channels

Min-Hsiu Hsieh,¹ Zhicheng Luo,² and Todd Brun³

¹*Ming Hsieh Department of Electrical Engineering,
University of Southern California, Los Angeles, CA 90089*

²*Physics Department, University of Southern California, Los Angeles, CA 90089.*

³*Ming Hsieh Electrical Engineering Department, University of Southern California, Los Angeles, CA 90089*

We prove a regularized formula for the secret key-assisted capacity region of a quantum channel for transmitting private classical information. This result parallels the work of Devetak on entanglement assisted quantum communication capacity [1]. This formula provides a new family protocol, the private father protocol, under the resource inequality framework that includes private classical communication *without secret key assistance as a child protocol*.

PACS numbers: 03.67.Hk, 03.67.Mn, 03.67.Pp

Keywords: Private channel capacity, father protocol, secret keys, and resource inequality.

I. INTRODUCTION

Secret keys, by definition, refer to common randomness available to a sender and receiver at distant locations while any other party has absolutely no information about it. Generating secret keys requires preserving secrecy from a third party [2]. An information-theoretic model in the classical setting is the “wiretap channel” [3], where the sender wants to communicate with one legitimate receiver while keeping the eavesdropper completely ignorant of the message sent. Private communication can be achieved via encryption once secret keys are generated. Secret keys are a valuable resource that can be used to achieve information transmission tasks.

The above scenario has a quantum analogue, where secret keys are generated over a quantum channel. The secret key generating protocol has been proposed by several authors [4, 5, 6], and in [7], it has been shown that the capacity of a quantum channel for transmitting private classical information is the same as the capacity of the same channel for generating secret keys. Furthermore, neither capacity is enhanced by public classical communication in the forward direction. This raises the interesting question of how these different resources interconvert in a quantum information protocol, and was partially answered in [1, 8, 9].

The formal treatment of quantitative interconversions between nonlocal information processing resources is studied in [1], wherein such an asymptotically faithful conversion is expressed as a *resource inequality* (RI). These resource inequalities are extremely powerful, and sometimes lead to new quantum protocols [8]. For example, they allow us to relate the *family protocols* to several well-known quantum protocols by direct application of teleportation or superdense coding, etc.

In this paper, we study the private classical communication capacity over a quantum channel assisted by a secret key. We show that secret keys are a useful nonlocal resource that can increase the private classical communication capacity over quantum channels; however, unlim-

ited secret keys do not help. The trade-off between the rate of secret key consumption and the rate of increased private classical communication is presented quantitatively. Under the RI framework, our protocol can be understood as a “private father protocol” due to its similarity to the original father protocol. Furthermore, the unassisted private classical communication capacity [7] can be seen as a child protocol.

This paper is organized as follows. Section II contains definitions, notation, and relevant background material. Section III contains statements and proofs of our main result. In section IV, we rewrite our result under the RI framework, and show how to recover the unassisted private classical capacity from ours. We conclude in section V.

II. NOTATION

Consider a classical-quantum system XQ in the state described by an ensemble $\{p(x), \rho_x\}$ with $p(x)$ defined on $\mathcal{X}$ and ρ_x being density operators on the Hilbert space $\mathcal{H}_Q$ of system Q . Such a state ρ^{XQ} of systems XQ can be represented by the “enlarged Hilbert space” (EHS) representation:

$$\rho^{XQ} = \sum_x p(x) |x\rangle\langle x|^X \otimes \rho_x^Q,$$

where X is a dummy quantum system and $\{|x\rangle : x \in \mathcal{X}\}$ is an orthonormal basis for the Hilbert space $\mathcal{H}_X$ of system X . The reduced density operators of systems X and Q are $\rho^X = \text{Tr}_Q \rho^{XQ} = \sum_x p(x) |x\rangle\langle x|$, and $\rho^Q = \text{Tr}_X \rho^{XQ}$ respectively. The von Neumann entropy of the quantum state ρ^Q is $H(Q)_\rho = -\text{Tr}(\rho^Q \log \rho^Q)$. (We will omit the subscript ρ when the state is clear from the context.) Notice that the von Neumann entropy of the dummy quantum system X is equal to the Shannon entropy of random variable X whose probability distribution is $p(x)$. The conditional entropy is defined as

$$H(Q|X) = H(QX) - H(X). \quad (1)$$

It should be noted that conditioning on classical variables (systems) amounts to averaging; therefore (1) is also equal to

$$H(Q|X) = \sum_x p(x) H(Q)_{\rho_x}. \quad (2)$$

The mutual information is

$$I(X; Q) = H(X) + H(Q) - H(QX).$$

Next, we will briefly introduce definitions and properties of typical sequences and subspaces [10].

Let $\mathcal{T}_{X,\delta}^n$ denote the set of *typical sequences* associated with some random variable X such that for the probability distribution p defined on the set $\mathcal{X}$

$$\mathcal{T}_{X,\delta}^n = \left\{ x^n : \forall x \in \mathcal{X}, \left| \frac{N(x|x^n)}{n} - p(x) \right| \leq \delta \right\},$$

where $N(x|x^n)$ is the number of occurrences of x in the sequence $x^n := x_1 \cdots x_n$ of length n .

Assume the density operator ρ^Q of system Q has the following spectral decomposition: $\rho^Q = \sum_y p(y) |y\rangle\langle y|$. Then we can define the *typical projector* as

$$\Pi_{Q,\delta}^n = \sum_{y^n \in \mathcal{T}_{Y,\delta}^n} |y^n\rangle\langle y^n|, \quad (3)$$

where $|y^n\rangle$ is a state in $\mathcal{H}_Q^{\otimes n}$. For a collection of states $\{\rho_x, x \in \mathcal{X}\}$, the *conditional typical projector* is defined as

$$\Pi_{Q|X,\delta}(x^n) = \bigotimes_x \Pi_{Q|x,\delta}^{I_x}, \quad (4)$$

where $I_x = \{i : x_i = x\}$ is the indicator and $\Pi_{Q|x,\delta}^{I_x}$ denotes the tensor product of the typical projector of the density operator ρ_x^Q in the positions given by the set I_x with the identity everywhere else.

Fixing $\delta > 0$, we will need the following properties of typical subspaces and conditionally typical subspaces:

$$\text{Tr} \sigma_{x^n}^Q \Pi_{Q|X,\delta}^n(x^n) \geq 1 - \epsilon \quad (5)$$

$$\text{Tr} \sigma_{x^n}^Q \Pi_{Q,\delta(|\mathcal{X}|+1)}^n \geq 1 - \epsilon \quad (6)$$

$$\text{Tr} \Pi_{Q,\delta(|\mathcal{X}|+1)}^n \leq \alpha \quad (7)$$

$$\Pi_{Q|X,\delta}^n(x^n) \sigma_{x^n}^Q \Pi_{Q|X,\delta}^n(x^n) \leq \beta^{-1} \Pi_{Q|X,\delta}^n(x^n) \quad (8)$$

where $\alpha = 2^{n[H(Q)+c\delta]}$ and $\beta = 2^{n[H(Q|X)-c\delta]}$ for $\epsilon = 2^{-nc'\delta^2}$ and some constants c and c' .

Finally we need some facts about trace distances (taken from [10]). The trace distance between two density operators ρ and σ can be defined as

$$\|\rho - \sigma\|_1 = \text{Tr} |\rho - \sigma|,$$

where $|A| \equiv \sqrt{A^\dagger A}$ is the positive square root of $A^\dagger A$. The *monotonicity* property of trace distance is

$$\|\rho^{RB} - \sigma^{RB}\|_1 \geq \|\rho^B - \sigma^B\|_1. \quad (9)$$

III. MAIN RESULT

A. Classical-quantum channels

We begin by defining our private classical communication protocol for a $\{c \rightarrow qq\}$ channel from sender Alice to receiver Bob and eavesdropper Eve. The channel is defined by the map $\mathcal{W} : x \rightarrow \sigma_x^{BE}$, with $x \in \mathcal{X}$ and the state σ_x^{BE} defined on a bipartite quantum system BE ; Bob has access to subsystem B and Eve has access to subsystem E . Alice's task is to transmit, by some large number n uses of the channel $\mathcal{W}$, one of $\{0,1\}^{nR}$ equiprobable messages to Bob so that he can identify the message with high probability while at the same time Eve receives almost no information about the message. In addition, Alice and Bob are given some private strings (secret keys), picked uniformly at random from the set $\{0,1\}^{nR_s}$, before the protocol begins. The inputs to the channel $\mathcal{W}^{\otimes n}$ are classical sequences $x^n \in \mathcal{X}^n$ with probability $p^n(x^n)$. The outputs of $\mathcal{W}^{\otimes n}$ are density operators $\sigma_{x^n}^{BE} = \sigma_{x_1}^{BE} \otimes \cdots \otimes \sigma_{x_n}^{BE}$ living on some Hilbert space $\mathcal{H}^{B^n E^n}$.

An (n, R, R_s, ϵ) *secret key-assisted private channel code* consists of

- An encryption map $f : \{0,1\}^{nR} \times \{0,1\}^{nR_s} \rightarrow \{0,1\}^{nR}$, i.e. f generates an index random variable K uniformly distributed in $\{0,1\}^{nR}$ based on the classical message embodied in the random variable M and the shared secret key embodied in the random variable S . Furthermore, $f(m, s_1) \neq f(m, s_2)$ for $s_1 \neq s_2$ and $f(m_1, s) \neq f(m_2, s)$ for $m_1 \neq m_2$.
- An encoding map $E : \{0,1\}^{nR} \rightarrow \mathcal{X}^n$. Alice encodes the index k as $E(k)$ and sends it through the channel $\mathcal{W}^{\otimes n}$, generating the state

$$\Upsilon^{A_s B_s B E} = \frac{1}{2^{nR_s}} \sum_{s \in \{0,1\}^{nR_s}} |s\rangle\langle s|^{A_s} \otimes |s\rangle\langle s|^{B_s} \otimes \frac{1}{2^{nR}} \sum_{m \in \{0,1\}^{nR}} \sigma_{E(f(m,s))}^{BE} \quad (10)$$

- A decoding POVM $\{\Lambda_{k'}\}_{k' \in \{0,1\}^{nR}}$, where $\Lambda_{k'}$ is a positive operator acting on B and taking on values k' . Bob need to infer the index k through the POVM;
- A decryption map $g : \{0,1\}^{nR} \times \{0,1\}^{nR_s} \rightarrow \{0,1\}^{nR}$, where $g(f(m, s), s) = m, \forall s, m$. This allows Bob to recover Alice's message as $m' = g(k', s)$ based on k' and s ;

such that

$$\|\tilde{\Upsilon}^{BE} - \tau^B \otimes \sigma^E\|_1 \leq \epsilon, \quad (11)$$

where $\tilde{\Upsilon}^{BE}$ is the state of the subsystem BE after Bob's decoding operation, and

$$\tau^B = \frac{1}{2^{nR}} \sum_m |m\rangle\langle m|^B$$

contains the private classical information that is decoupled from Eve's state σ^E .

A rate pair (R, R_s) is called *achievable* if for any $\epsilon, \delta > 0$ and sufficiently large n there exists an $(n, R - \delta, R_s + \delta, \epsilon)$ private channel code. The private capacity region $C_{PF}(\mathcal{W})$ is a two-dimensional region in the (R, R_s) plane with all possible achievable rate pairs (R, R_s) .

We now state our main theorem.

Theorem 1 *The private channel capacity region $C_{PF}(\mathcal{W})$ is given by*

$$C_{PF}(\mathcal{W}) = \overline{\bigcup_{n=1}^{\infty} \frac{1}{n} \tilde{C}_{PF}^{(1)}(\mathcal{W}^{\otimes n})}, \quad (12)$$

where the notation $\overline{Z}$ means the closure of a set Z and $\tilde{C}_{PF}^{(1)}(\mathcal{W})$ is the set of all $R_s \geq 0, R \geq 0$ such that

$$R \leq I(X; B)_\sigma - I(X; E)_\sigma + R_s \quad (13)$$

$$R \leq I(X; B)_\sigma, \quad (14)$$

where $BE|X$ is given by $\mathcal{W}$ and σ is of the form

$$\sigma^{XBE} = \sum_x p(x) |x\rangle\langle x|^X \otimes \sigma_x^{BE}.$$

Proving that the right hand side of (12) is achievable is called the *direct coding theorem*, whereas showing that it is an upper bound is called the *converse*.

For the direct coding part, we will need the following lemma from [11], a quantum generalization of the covering lemma in [12].

Lemma 1 (Covering Lemma) *We are given an ensemble $\{p(x), \sigma_x\}_{x \in \mathcal{X}}$ with average density operator $\sigma = \sum_{x \in \mathcal{X}} p(x) \sigma_x$. Assume the existence of projectors Π and $(\Pi_x)_{x \in \mathcal{X}}$ with the following properties ($\forall x \in \mathcal{X}$):*

$$\begin{aligned} \text{Tr } \sigma_x \Pi_x &\geq 1 - \epsilon, \\ \text{Tr } \sigma_x \Pi &\geq 1 - \epsilon, \\ \text{Tr } \Pi &\leq \alpha, \\ \Pi_x \sigma_x \Pi_x &\leq \beta^{-1} \Pi_x. \end{aligned}$$

In addition, we require Π_x and σ_x to commute for all x . The obfuscation error of a set $\mathcal{S} \subseteq \mathcal{X}$ is defined as

$$oe(\mathcal{S}) = \left\| \frac{1}{|\mathcal{S}|} \sum_{x \in \mathcal{S}} \sigma_x - \sigma \right\|_1,$$

and is an upper bound on the probability of distinguishing the fake average from the real one. Define the set $\mathcal{C} = (X_s)_{s \in [\mathbf{S}]}$, where X_s is a random variable chosen independently according to the distribution p on $\mathcal{X}$, and $\mathbf{S} = \lceil \gamma^{-1} \alpha / \beta \rceil$ for some $0 < \gamma < 1$. Then

$$\Pr\{oe(\mathcal{C}) \geq 2\epsilon + 19\sqrt{\epsilon}\} \leq 2\alpha \exp(-\kappa_0 \epsilon^3 / \gamma). \quad (15)$$

Corollary 1 *Consider an ensemble $\{p^n(x^n), \sigma_{x^n}^E\}_{x^n \in \mathcal{X}^n}$ with average density operator $\sigma^E = \sum_{x^n} p^n(x^n) \sigma_{x^n}^E$, let random variables $X_1, X_2, \dots, X_{\mathbf{S}}$ all be independently distributed according to p^n and $\mathcal{C} = (X_s)_{s \in [\mathbf{S}]}$. Then for all $\epsilon, \delta > 0$ and sufficiently large n ,*

$$\Pr\{oe(\mathcal{C}) \geq 2\epsilon + 19\sqrt{\epsilon}\} \leq 2\alpha \exp(-\kappa_0 \mathbf{S} \epsilon^3 / \alpha). \quad (16)$$

where $\alpha = 2^{n[H(E)_\sigma + c\delta]}$, $\beta = 2^{n[H(E|X)_\sigma - c\delta]}$, $\mathbf{S} = 2^{nI(X; E)_\sigma + 3c\delta}$, and

$$oe(\mathcal{C}) = \left\| \frac{1}{\mathbf{S}} \sum_{s \in [\mathbf{S}]} \sigma_{X_s}^E - \sigma^E \right\|_1.$$

Proof We can relate to Lemma 1 through the identifications: $\mathcal{X} \rightarrow \mathcal{X}^n$, $\sigma_x \rightarrow \sigma_{x^n}$, $p \rightarrow p^n$, $\sigma \rightarrow \sigma^E$, $\Pi \rightarrow \Pi_{E, \delta(|\mathcal{X}|+1)}^n$ and $\Pi_x \rightarrow \hat{\Pi}_{E|X, \delta}^n(x^n)$ with

$$\hat{\Pi}_{E|X, \delta}^n(x^n) = \begin{cases} \Pi_{E|X, \delta}^n(x^n) & x^n \in \mathcal{T}_{X, \delta}^n \\ 0 & \text{otherwise.} \end{cases}$$

The four conditions now read (for all $x^n \in \mathcal{X}^n$),

$$\text{Tr } \sigma_{x^n}^E \hat{\Pi}_{E|X, \delta}^n(x^n) \geq 1 - \epsilon, \quad (17)$$

$$\text{Tr } \sigma_{x^n}^E \Pi_{E, \delta(|\mathcal{X}|+1)}^n \geq 1 - \epsilon, \quad (18)$$

$$\text{Tr } \Pi_{E, \delta(|\mathcal{X}|+1)}^n \leq \alpha, \quad (19)$$

$$\hat{\Pi}_{E|X, \delta}^n(x^n) \sigma_{x^n}^E \hat{\Pi}_{E|X, \delta}^n(x^n) \leq \beta^{-1} \hat{\Pi}_{E|X, \delta}^n(x^n). \quad (20)$$

These follow from the properties of typical subspaces and conditionally typical subspaces mentioned before. $\square$

We will also need the Holevo-Schumacher-Westmoreland (HSW) theorem [13, 14].

Proposition 1 (HSW theorem) *Given an ensemble*

$$\sigma^{XB} = \sum_{x \in \mathcal{X}} p(x) |x\rangle\langle x|^X \otimes \sigma_x^B,$$

and integer n , consider the encoding map $E : [\mathbf{K}] \rightarrow \mathcal{X}^n$ given by $E(k) = X_k$, where $k \in [\mathbf{K}] : 1, 2, \dots, \mathbf{K}$, and $\{X_k\}$ are random variables chosen according to the i.i.d. distribution p^n . For any $\epsilon, \delta > 0$ and sufficiently large n , there exists a decoding POVM set $(\Lambda_k)_{k \in [\mathbf{K}]}$ on B for the encoding map E with $\mathbf{K} = 2^{n[I(X; B) - 2(c+c'\delta)\delta]}$, and some c , such that for all k ,

$$\mathbb{E} \sum_{k'} |\pi(k'|k) - \delta(k, k')| \leq \epsilon.$$

Here $\pi(k'|k)$ is the probability of decoding k' conditioned on k having been encoded:

$$\pi(k'|k) = \text{Tr}(\Lambda_{k'} \sigma_{E(k)}), \quad (21)$$

$\delta(s, s')$ is the delta function and the expectation is taken over the random encoding.

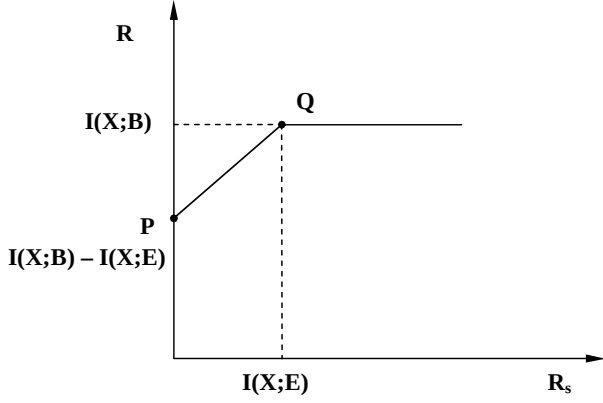


Figure 1: Private classical communication capacity region of $\{c \rightarrow qq\}$ channel when assisted by a pre-shared secret key.

Now we are ready to prove the direct coding theorem.

Proof [direct coding theorem]

The capacity region is shown in Fig. 1. This trade-off region includes two limit points P and Q . When $R_s = 0$ (Point P), the private classical capacity of $\mathcal{W}$ is equal to $I(X; B) - I(X; E)$. This is the well-known private classical communication capacity proved in [7]. In our case, it suffices to prove Point Q is optimal; that is, the achievability of the rate pair $(R, R_s) = (I(X; B), I(X; E))$. The idea of the proof is as follows: instead of sacrificing $nI(X; E)$ bits of classical message to randomize Eve's knowledge of the state, Alice and Bob use a pre-shared secret key to do so. For all $\epsilon, \delta > 0$ and sufficiently large n , we show below that a private information transmission rate of $I(X; B)$ is achievable if Alice and Bob consume a pre-shared secret key with rate $I(X; E)$.

Fix $\epsilon, \delta > 0$ and a sufficiently large n . Consider the ensemble $\{p^n(x^n), \sigma_{x^n}^{BE}\}$ of the channel output $\mathcal{W}^{\otimes n}$. There exists an encoding map $E : K \rightarrow X_K$ for Alice on the encryption output $K = f(M, S)$ where X_K is i.i.d. with distribution p^n , M represents the classical message taken values from $\{0, 1\}^{nR}$, and S represents the pre-shared secret key values taken from $\{0, 1\}^{nR_s}$. Here $\{X_K\}$ serves as a HSW code.

In the following, we will explicitly use $f(m, s)$ instead of its index k . For each $m \in \{0, 1\}^{nR}$, define $\mathcal{C}_m = (X_{f(m, s)})_{s \in [2^{nR_s}]}$. $\mathcal{C}_m$ works as a covering code as define in Corollary 1. Choose $R_s = I(X; E) + 3(c + c'\delta)\delta$. For any $m \in \{0, 1\}^{nR}$, define the logic statement ℓ_m by $oe(\mathcal{C}_m) \leq 2\epsilon + 19\sqrt{\epsilon}$, where

$$oe(\mathcal{C}_m) = \left\| \frac{1}{2^{nR_s}} \sum_s \sigma_{X_{f(m, s)}}^E - \sigma^E \right\|_1,$$

$\sigma^E = \sum_{x^n} p^n(x^n) \sigma_{x^n}^E$ and $\sigma_{x^n}^E = \text{Tr}_B \sigma_{x^n}^{BE}$. By Corollary 1,

$$\Pr\{\text{not } \ell_m\} \leq 2\alpha \exp(-\kappa_0 2^{nR_s} \epsilon^3 \beta / \alpha), \quad \forall m. \quad (22)$$

The probability of (22) can be made $\leq \epsilon 2^{-nR}$ when n is sufficient large.

We now invoke Proposition 1. Choose $R = I(X; B) - 2(c + c'\delta)\delta$. There exists a POVM $(\Lambda_{k'})_{k' \in \{0, 1\}^{nR}}$ acting on B such that for all k ,

$$\mathbb{E} \sum_{k'} |\pi(k'|k) - \delta(k, k')| \leq \epsilon. \quad (23)$$

After Bob performs the POVM, the state (10) becomes

$$\hat{\Upsilon} = \frac{1}{2^{nR_s}} \sum_s |s\rangle\langle s|^{A_s} \otimes |s\rangle\langle s|^{B_s} \otimes \frac{1}{2^{nR}} \sum_{m, k'} \pi(k'|f(m, s)) |k'\rangle\langle k'|^B \otimes \sigma_{X_{f(m, s)}}^E,$$

which is close to

$$\hat{\Upsilon}_0 = \frac{1}{2^{nR_s}} \sum_s |s\rangle\langle s|^{A_s} \otimes |s\rangle\langle s|^{B_s} \otimes \frac{1}{2^{nR}} \sum_m |f(m, s)\rangle\langle f(m, s)|^B \otimes \sigma_{X_{f(m, s)}}^E$$

in the sense that $\mathbb{E}\|\hat{\Upsilon} - \hat{\Upsilon}_0\|_1 \leq \epsilon$ by condition (23).

Bob applies the decryption map g to his system B , resulting in a state $\tilde{\Upsilon}^{A_s B_s B E}$. By the monotonicity of trace distance (9), we have

$$\mathbb{E}\|\tilde{\Upsilon}^{BE} - \tilde{\Upsilon}_0^{BE}\|_1 \leq \epsilon,$$

where

$$\tilde{\Upsilon}_0^{BE} = \frac{1}{2^{nR}} \sum_m |m\rangle\langle m|^B \otimes \frac{1}{2^{nR_s}} \sum_s \sigma_{X_{f(m, s)}}^E.$$

By the Markov inequality, $\Pr\{\text{not } \ell_0\} \leq \sqrt{\epsilon}$, where ℓ_0 is the logic statement

$$\|\tilde{\Upsilon}^{BE} - \tilde{\Upsilon}_0^{BE}\|_1 \leq \sqrt{\epsilon}. \quad (24)$$

By the union bound,

$$\Pr\{\text{not } (\ell_0 \& \ell_1 \& \dots \& \ell_{|m|})\} \leq \sum_{i=0}^{2^{nR}} \Pr\{\text{not } \ell_i\} \leq \epsilon + \sqrt{\epsilon}.$$

Hence there exists a specific choice of $\{X_{f(m, s)}\}$, say $\{x_{f(m, s)}\}$, for which all these conditions are satisfied. Consequently,

$$\begin{aligned} \|\tilde{\Upsilon}^{BE} - \tau^B \otimes \sigma^E\|_1 &\leq \|\tilde{\Upsilon}^{BE} - \tilde{\Upsilon}_0^{BE}\|_1 \\ &\quad + \|\tilde{\Upsilon}_0^{BE} - \tau^B \otimes \sigma^E\|_1 \\ &\leq 2\epsilon + 20\sqrt{\epsilon}. \end{aligned}$$

as claimed. $\square$

Proof [converse]

We shall prove that, for any $\delta, \epsilon > 0$ and sufficiently large n , if an (n, R, R_s, ϵ) secret keys assisted private channel code has rate R then (13) and (14) hold.

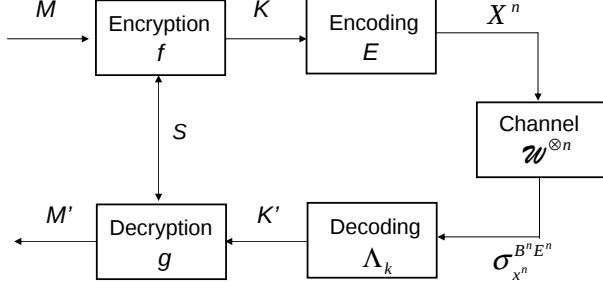


Figure 2: Private classical communication protocol assisted by pre-shared secret key.

The private classical communication protocol is shown in Fig. 2

$$\begin{aligned} nR &= H(K) \\ &= I(K; K') + H(K|K') \\ &\leq I(K; K') + 1 + n\epsilon \log |\mathcal{X}|, \end{aligned}$$

where the last inequality follows from Fano's inequality:

$$H(K|K') \leq 1 + \Pr\{K \neq K'\}nR,$$

and $\Pr\{K \neq K'\} \leq \epsilon$ is guaranteed by the HSW theorem. Hence,

$$I(K; K') \leq I(K; B^n) \quad (25)$$

$$\leq I(X^n; B^n), \quad (26)$$

where the first inequality follow from the data processing inequality while the second inequality comes from the Markov condition $K \rightarrow X^n \rightarrow B^n E^n$. We then have

$$R - \delta \leq \frac{1}{n} I(X^n; B^n), \quad (27)$$

where without loss of generality $\epsilon \leq \frac{\delta}{6 \log |\mathcal{X}|}$ and $n \geq \frac{2}{\delta}$. This proves (14).

On the other hand,

$$\begin{aligned} I(MS; M'S) &= I(MS; M'|S) + I(S; MS) \\ &\leq I(K; M'|S) + H(S) \end{aligned} \quad (28)$$

$$\leq I(K; B^n|S) + H(S) \quad (29)$$

$$\leq I(X^n; B^n|S) + H(S) \quad (30)$$

where (28) follows from $I(MS; M'|S) = I(K; M'|S)$ and $I(S; MS) \leq H(S)$, (29) follows from data processing inequality, and (30) follows from the Markov condition $K \rightarrow X^n \rightarrow B^n E^n$. Furthermore, (24) guarantees that

$$\epsilon \geq I(M; E^n|S) \quad (31)$$

$$= I(K; E^n|S) \quad (32)$$

$$\geq I(X^n; E^n|S). \quad (33)$$

Combining (30) and (33) gives

$$I(M; M') \leq I(MS; M'S) \quad (34)$$

$$\leq I(X^n; B^n|S) - I(X^n; E^n|S) \quad (35)$$

$$+ H(S) + \epsilon. \quad (36)$$

Hence

$$nR = H(M) \quad (37)$$

$$= I(M; M') + H(M|M') \quad (38)$$

$$\leq I(M; M') + 1 + n\epsilon \log |\mathcal{X}|, \quad (39)$$

where (39) follows from the Fano's inequality. Choosing $\epsilon \leq \frac{\delta}{6 \log |\mathcal{X}|}$ and $n \geq \frac{2}{\delta}$, (36) and (39) give

$$R - \delta \leq \frac{1}{n} [I(X^n; B^n|S) - I(X^n; E^n|S) + H(S)] \quad (40)$$

$$= \frac{1}{n} [I(X^n; B^n|S) - I(X^n; E^n|S)] + R_s, \quad (41)$$

where $R_s = \frac{H(S)}{n}$. Since we can write

$$\frac{1}{n} [I(X^n; B^n|S) - I(X^n; E^n|S)], \quad (42)$$

as the average with respect to the distribution of S , and $K_s \rightarrow X_s^n \rightarrow B_s^n X_s^n$ holds for each s , we can choose a particular value of s that maximizes (13). $\square$

B. Generic quantum channels

Suppose now that Alice and Bob are connected by a noisy quantum channel $\mathcal{N} : \mathcal{B}(\mathcal{H}_A) \rightarrow \mathcal{B}(\mathcal{H}_B)$, where $\mathcal{B}(\mathcal{H})$ denotes the space of bounded linear operators on $\mathcal{H}$. Let $U_{\mathcal{N}} : \mathcal{B}(\mathcal{H}_A) \rightarrow \mathcal{B}(\mathcal{H}_{BE})$ be an isometry extension of $\mathcal{N}$ that includes the unobserved environment E which is completely under the control of the eavesdropper Eve. Theorem 1 then can be rewritten as the following

Theorem 2 *The private channel capacity region $C_{PF}(\mathcal{N})$ is given by*

$$C_{PF}(\mathcal{N}) = \overline{\bigcup_{n=1}^{\infty} \frac{1}{n} \tilde{C}_{PF}^{(1)}(\mathcal{N}^{\otimes n})}, \quad (43)$$

where the notation $\overline{Z}$ means the closure of a set Z and $\tilde{C}_{PF}^{(1)}(\mathcal{N})$ is the set of all $R_s \geq 0$, $R \geq 0$ such that

$$R \leq I(A; B)_{\sigma} - I(A; E)_{\sigma} + R_s \quad (44)$$

$$R \leq I(A; B)_{\sigma}, \quad (45)$$

where σ is of the form

$$\sigma^{ABE} = U_{\mathcal{N}}^{A' \rightarrow BE}(|\psi\rangle^{AA'}),$$

for some pure input state $|\psi\rangle^{AA'}$ whose reduced density operator $\rho^{A'} = \sum_x p(x) \rho_x$ and $U_{\mathcal{N}} : A' \rightarrow BE$ is an isometric extension of $\mathcal{N}$.

With the spectral decomposition of the input state $\rho^{A'} = \sum_x p(x) \rho_x$, each $U_{\mathcal{N}}$ induces a corresponding $\{c \rightarrow qq\}$ channel. Therefore, the results of the previous section can be directly applied here.

IV. PRIVATE FATHER PROTOCOL

In this section, we will phrase our result using the theory of resource inequalities developed in [8]. The channel $\mathcal{N} : A \rightarrow B$ assisted by some rate R_s of secret key shared between Alice and Bob was used to enable a rate R of secret communication between Alice and Bob. This is written as

$$\langle \mathcal{N} \rangle + R_s [cc]^* \geq R [c \rightarrow c]^*. \quad (46)$$

This resource inequality holds iff $(R_s, R) \in C_{PF}(\mathcal{N})$, with $C_{PF}(\mathcal{N})$ given in Theorem 2. The “if” direction, i.e. the direct coding theorem, followed from the “corner points”

$$\langle \mathcal{N} \rangle + I(A; E) [cc]^* \geq I(A; B) [c \rightarrow c]^*. \quad (47)$$

This resource inequality (47) is called the *private father protocol* due to its similarity of the father protocol in [8].

We can recover the unassisted private channel capacity result in [7]:

$$\langle \mathcal{N} \rangle \geq I_c(A; B) [c \rightarrow c]^*. \quad (48)$$

This resource inequality can be obtained by appending the following noiseless resource inequality

$$[c \rightarrow c]^* \geq [cc]^* \quad (49)$$

to the output of (47).

V. CONCLUSION

In this paper, we have found a regularized expression for the secret keys assisted capacity region $C_{PF}(\mathcal{N})$ of a quantum channel $\mathcal{N}$ for transmitting private classical information. Our result shows that secret key are a valuable nonlocal resource for transmitting private information. One interesting problem is to investigate how secret keys can be applied in other quantum protocols. For example, it might be plausible that the entanglement generation protocol could be boosted by secret keys. However, the result seems unlikely. In particular, it is impossible to construct a secret key-assisted entanglement generation protocol by simply coherifying the protocol proposed in this paper. Another open problem is to obtain a single-letterized formula of Theorem 1.

Acknowledgment

We are grateful to Igor Devetak for valuable discussions. MH and ZL were supported by NSF grant no. 0524811. TAB was supposed by NSF grant no. 0448658.

-
- [1] I. Devetak, A. W. Harrow, and A. Winter. A resource framework for quantum shannon theory, 2005. quant-ph/0512015.
 - [2] Rudolph Ahlswede and Imre Csiszár. Common randomness in information theory and cryptography – part i: Secret sharing. *IEEE Trans. Inf. Theory*, 39:1121–1132, 1993.
 - [3] A. D. Wyner. The wire-tap channel. *Bell. Sys. Tech. Jour.*, 54:1355–1387, 1975.
 - [4] S. Lloyd. The capacity of a noisy quantum channel. *Phys. Rev. A*, 55:1613–1622, 1997.
 - [5] B. Schumacher and M. A. Nielsen. Quantum data processing and error correction. *Phys. Rev. A*, 54:2629–2635, 1996.
 - [6] I. Devetak and A. Winter. Relating quantum privacy and quantum coherence: an operational approach. *Phys. Rev. Lett.*, 93:080501, 2004.
 - [7] I. Devetak. The private classical capacity and quantum capacity of a quantum channel. *IEEE Trans. Inf. Theory*, 51(1):44–55, 2005.
 - [8] I. Devetak, A. W. Harrow, and A. J. Winter. A family of quantum protocols. *Phys. Rev. Lett.*, 93:239503, 2004.
 - [9] Anura Abeyesinghe, Igor Devetak, Patrick Hayden, and Andreas Winter. The mother of all protocols: Restructuring quantum information’s family tree, 2006. quant-ph/0606225.
 - [10] M. A. Nielsen and I. L. Chuang. *Quantum Computation and Quantum Information*. Cambridge University Press, New York, 2000.
 - [11] I. Devetak, P. Hayden, and A. Winter. *Principles of Quantum Information Theory*. 2006. in preparation.
 - [12] Z. Luo and I. Devetak. Channel simulation with quantum side information, 2006. quant-ph/0611008.
 - [13] A. S. Holevo. The capacity of the quantum channel with general signal states. *IEEE Trans. Inf. Theory*, 44:269–273, 1998.
 - [14] B. Schumacher and M. D. Westmoreland. Sending classical information via noisy quantum channels. *Phys. Rev. A*, 56:131–138, 1997.